


MiniPlus FF06-AAM

Rinsable fine filter
with brass filter bowl

Product specification sheet

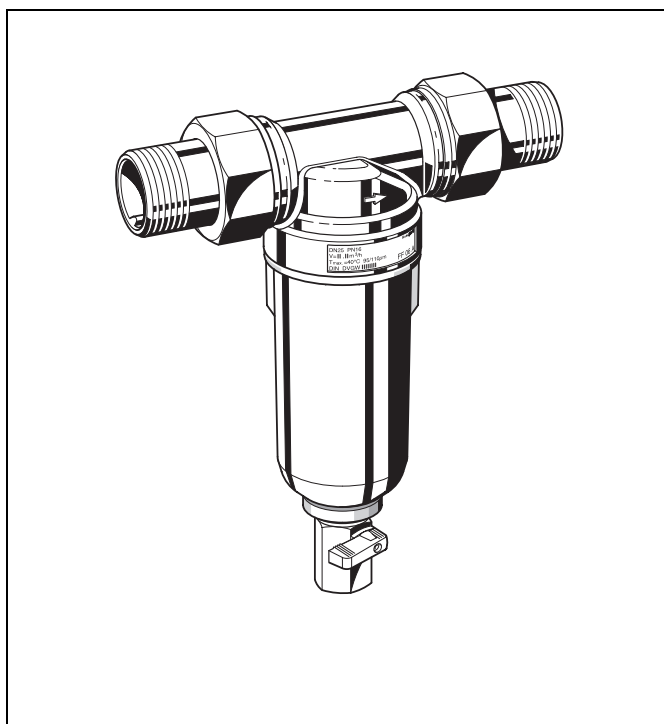

Construction

The fine filter comprises:

- Housing with female and male threads
- Threaded connections
- Fine filter in brass filter bowl
- Ball valve
- Double wing wrench

Materials

- Body of dezincification resistant pressed brass
- Brass threaded connections
- Stainless steel fine filter
- Dezincification resistant brass filter bowl

Application

Rinsable MiniPlus FF06-AAM fine filters ensure a continuous supply of filtered water. The fine filter stops the flow of particulates, for example rust particles, strands of hemp, or grains of sand. Sediment collected at the bottom of the filter bowl can simply be removed by rinsing the filter.

Compact in size, these filters were designed to fit where space is limited.

Special Features

- Simple assembly
- Filtered water supply even during rinsing
- Filter bowl of brass - suitable for hot water installations
- Filter and complete filter bowl are replaceable
- Body with female and male threads


Range of Application

Medium Water

The filter is constructed for drinking water installations. In case of a process water application the filter has to be proven individually.

Technical Data

Installation position	Horizontal, with filter bowl downwards
Operating pressure	Maximum 25.0 bar
Operating temperature	Maximum 70 °C
Connection size	1/2", 3/4", 1", 1 1/4"

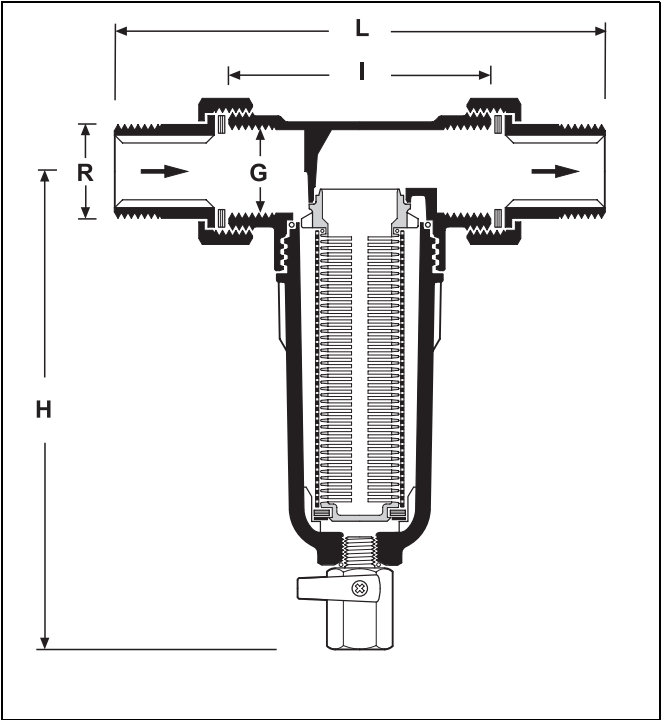

Method of Operation

The fine filter is composed of a body and a rinsable fine filter insert.


During normal operation, water flows through the filter mesh to the body outlet. To rinse the filter, the ball valve is opened which discharges the dirt particles. A continuous supply of filtered water is available also during the rinse cycle.

Options

FF06-...AAM = Threaded male connections,
filter mesh size 100 µm


Connection size

Connection size	R	1/2"	3/4"	1"	1 1/4"
Internal threads	G	1/2"	3/4"	1"	-
Weight	approx. kg	1.4	1.46	1.76	1,5
Dimensions	mm				
	L	140	158	179	197
	I	80	90	100	105
	h	158	180	180	180
Flow value at Δp = 0.5 bar	m³/h	1.27	2.27	7.0	7.0
k _{VS} -value		4.0	5.8	10.4	10.4

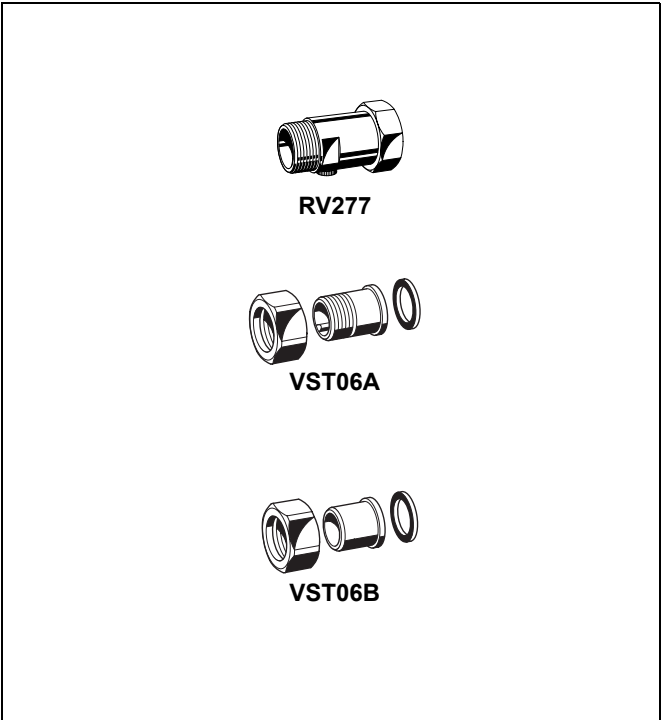

Accessories

- RV277 Inlet check valve**
Available in sizes R1/2" - 2"
- VST06 Connection set**
Connection set
A = Threaded male connection;
B = Solder union connection

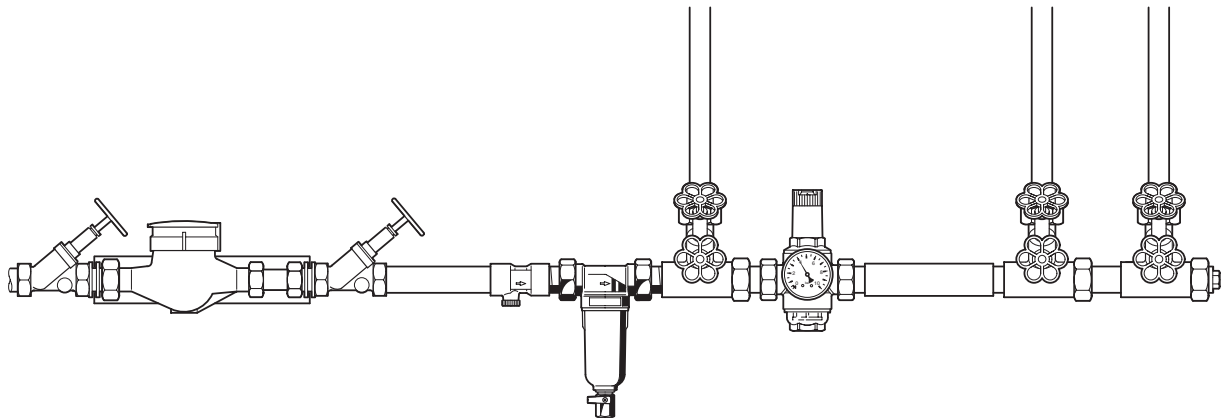Installation Example**Installation Guidelines**


- Install in horizontal pipework with filter bowl downwards
 - This position ensures optimum filter efficiency
- Install shutoff valves
- Ensure good access
 - Simplifies maintenance and inspection
- The installation location should be protected against frost
- Fit immediately after water meter
 - Corresponds to DIN 1988, Part 2


Typical Applications

Fine filters of this type are suitable for supplies to buildings of all types. They can also be used for commercial and industrial applications within the limits of their specifications.

Fine filters of this type are installed:

- If the downstream system includes appliances which must be protected against dirt
- Where no pressure reducing valve is required (maximum 5.0 bar static pressure)
- Where a pressure reducing valve is already fitted but cannot be retrofitted with a filter

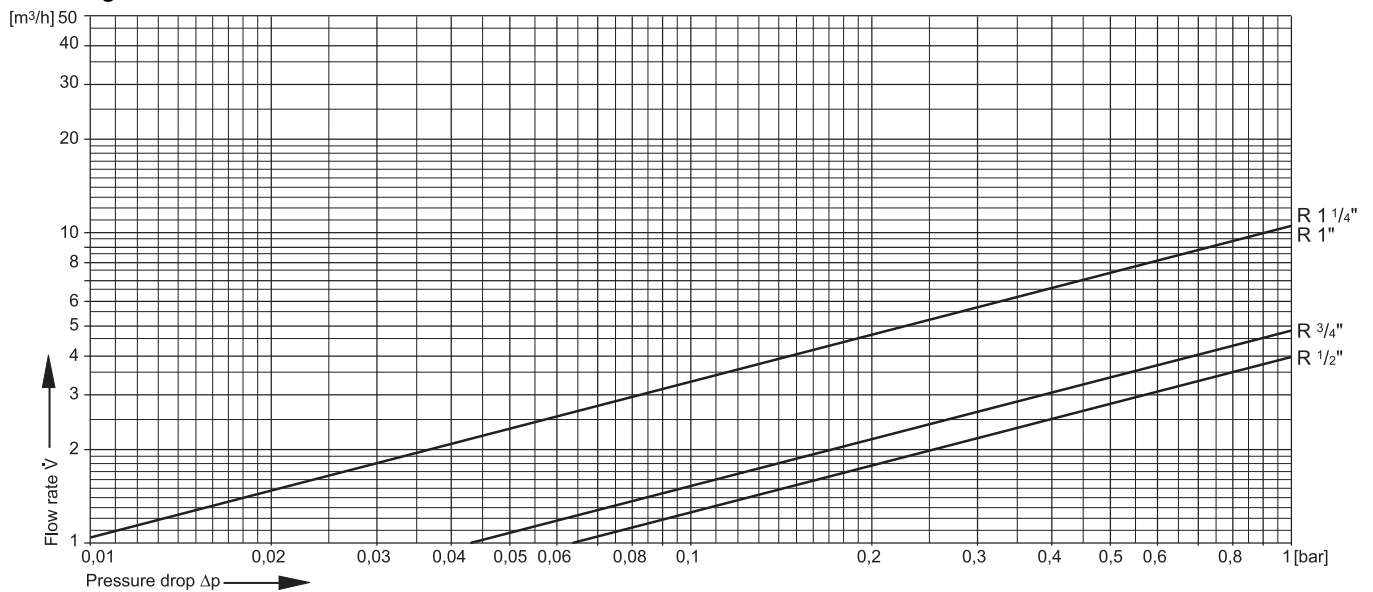Flow Diagram

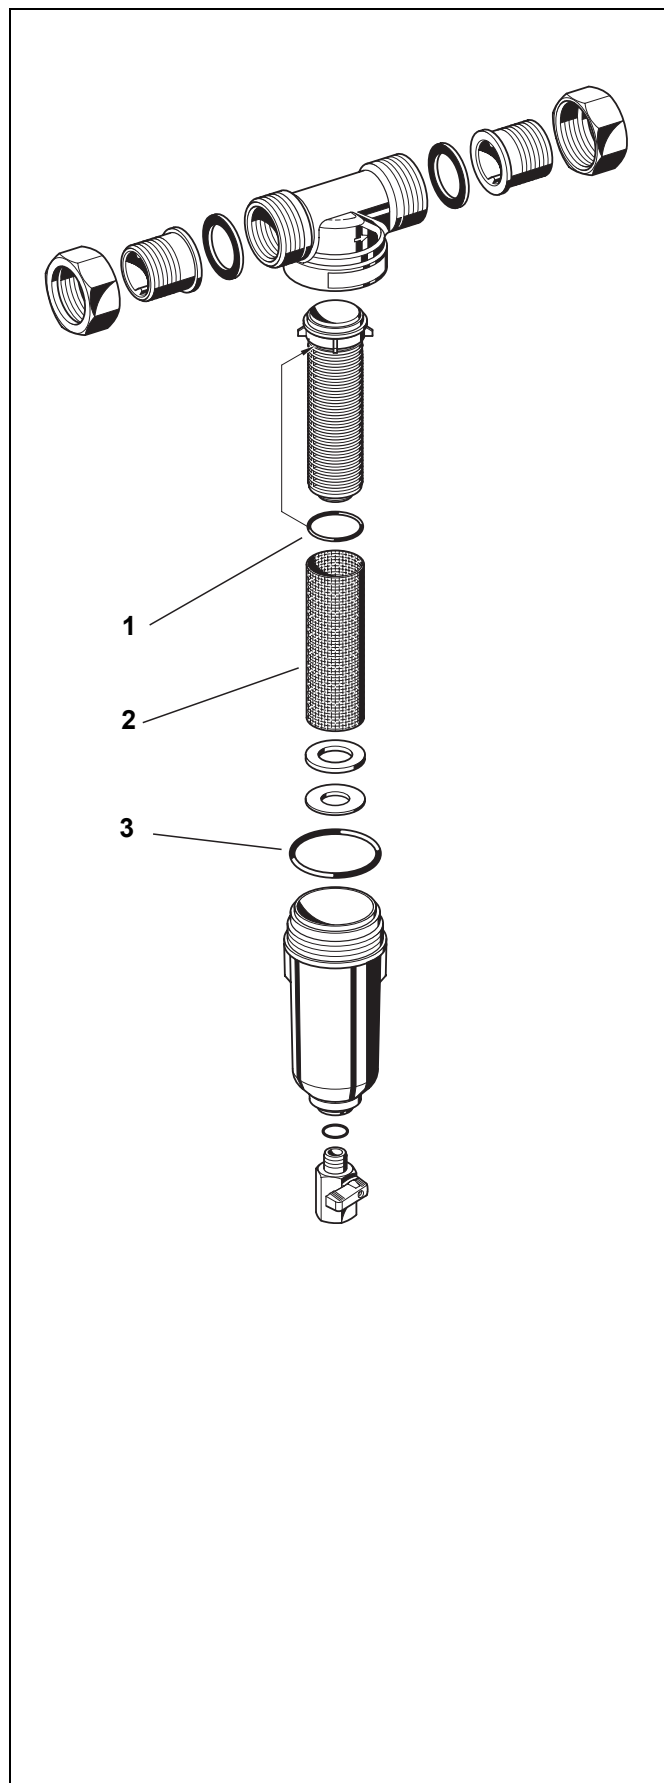

Spare Parts

MiniPlus FF06-AAM Fine Filters (From 1997 onwards)

1	O-ring set for mesh carrier (pack of 10)	1/2"	0903127
		3/4" - 1 1/4"	0903128
2	Replacement sieve	1/2"	AS06-1/2A
		3/4" - 1 1/4"	AS06-1A
3	O-ring set for filter bowl (pack of 10)	1/2"	0901246
		3/4" - 1 1/4"	0901499
4	Double ring wrench For removing filter bowl (no fig.)	1/2" - 1 1/4"	ZR06F

Automation and Control Solutions

Honeywell GmbH
Hardhofweg
74821 MOSBACH
GERMANY
Phone: (49) 6261 810
Fax: (49) 6261 81309
www.honeywell.com

Manufactured for and on behalf of the
Environmental and Combustion Controls Division
of Honeywell Technologies Sàrl, Z.A. La Pièce 16,
1180 Rolle, Switzerland by its Authorised Repre-
sentative Honeywell GmbH

EN0H-1127GE23 R1211
Subject to change without notice
© 2011 Honeywell GmbH

Honeywell